




Product data sheet

Power tools for trade & industry

Line Laser

GLL 3-80 C

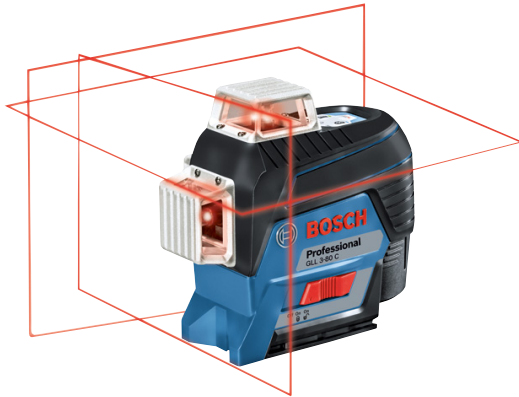

Visibility on a new level in 3 x 360°. Simply Connected.

The most important data

Working range with receiver	120 m
Working range, value	30 m
Accuracy	± 0.2 mm/m

Order number 0 601 063 R01

Technical data

Additional data

Tripod thread	1/4", 5/8"
Battery voltage	12.0 V
Laser diode	Line: 630 - 650 nm, < 10mW
Operating temperature	-10 – 40 °C
Storage temperature	-20 – 70 °C
Laser class	2
Working range, value	30 m
Working range with receiver	120 m
Accuracy	± 0.2 mm/m
Self-levelling range	± 4°
Levelling time	4 s
Dust and splash protection	IP54 (except for the battery or battery adapter)
Power supply	12 V Li-Ion battery, 4 x 1.5 V LR6 (AA)
Operating time (max.)	8 h (Li-Ion) and 6 h (4 x AA) in 3-line mode
Weight, approx.	0.9 kg
Colour of laser line	red
Projection	3 x 360° line
Compatible laser receivers	LR 6 + 7

**BOSCH**

Invented for life

Product data sheet

Power tools for trade & industry

Advantages:

- Very precise CAL Guard monitoring and remote-control use with Bluetooth®-connected smartphone app
 - High visual clarity is provided by high-powered diodes
 - 3 x 360° lines allow simultaneous horizontal and vertical levelling applications for highly efficient work
-

